


# Technical sheet

Valve for air intake and outflow

Product description

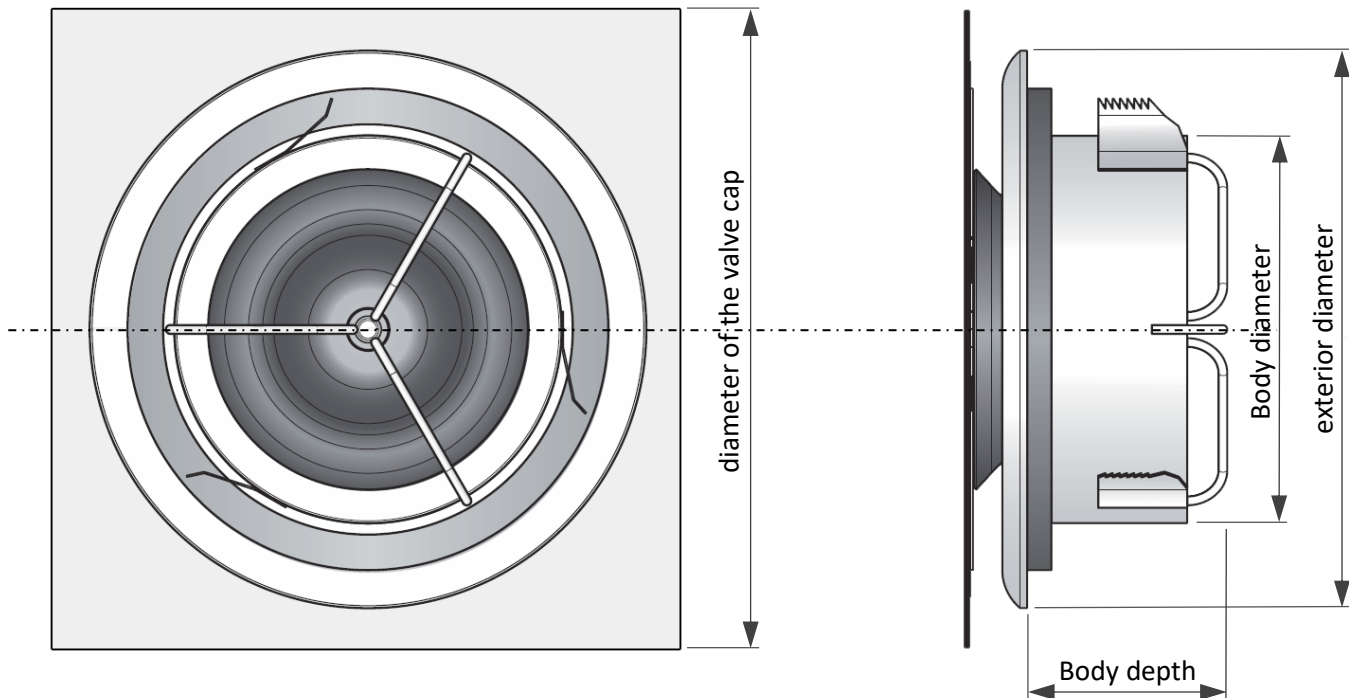

pipe diameter	body diameter	exterior diameter	body depth	diameter of the valve cap
100	90	137,5	54	200
125	114	156	57	200
160	149	191	57	230

dimensions in mm

Valve intended for attachment to a wall or ceiling for air intake or outflow.

Use: New builds, reconstructions, valve replacement.

A big advantage of this valve is very easy installation method.

The valve consists of two parts: The body of the valve and the glass front plate.

The body of the valve is fitted within a system of piping by three metal springs.

The glass front plate is attached to the body of the valve using springs.

Glass front plate shapes: circle or square

It is recommended to instal with VRGL, ILU or ILF (Lindab) elements. It can be mounted directly into SPIRO piping.



Material: galvanised metal sheet

Colour: white RAL 9003

Maintenance: The visible parts can be wiped with a moist cloth.